



Automatic event picking in prestack migrated gathers using a probabilistic neural network

**Michael Glinsky, Bill Butler, Sandhya Devi and Jim Robinson
Shell E&P Technology Company**

**Greg Clark
Lawrence Livermore National Laboratory**


**Peter Cheng and Gary Ford
University of California, Davis**

Agenda



- introduction and problem definition
- overview of processing scheme
- detailed example of algorithm application
- summary and future work

There is a velocity analysis bottleneck in prestack migration

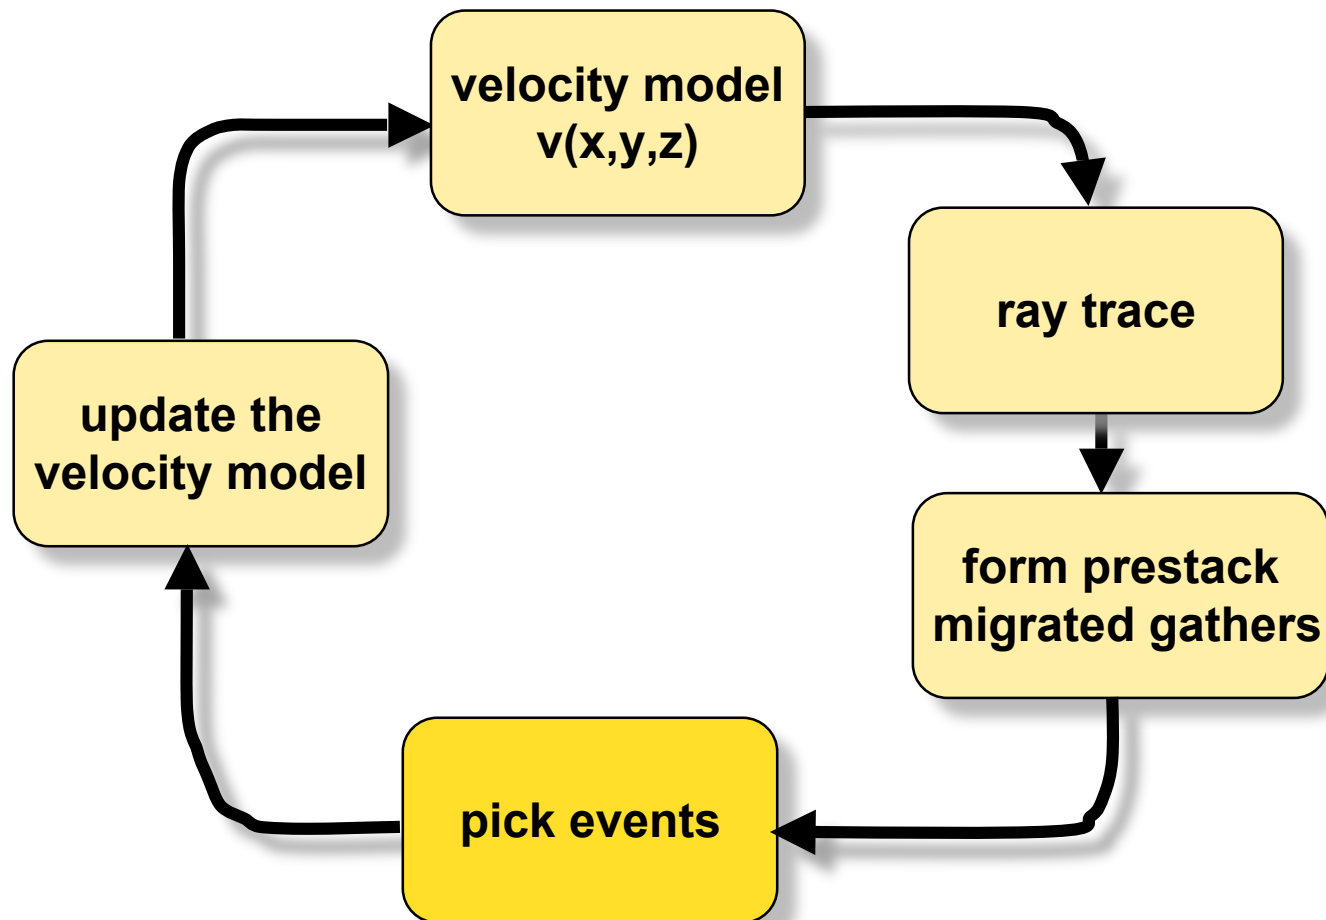


Why does this bottleneck exist?



- **iterative process of converging to velocity model is limited by picking events**
- **picking is currently performed manually**
 - 2D datasets, >10,000 traces
- **not feasible with larger datasets**
 - 3D datasets, >1,000,000 traces
- **done manually for quality control**
 - eliminate “loop skips”
- **goal is to automate the event picking process**
 - manual picks only for training and “context”
 - reduce manual picking to less than 0.1% of data

Neural networks automate picking and tracking of events on CRP panels

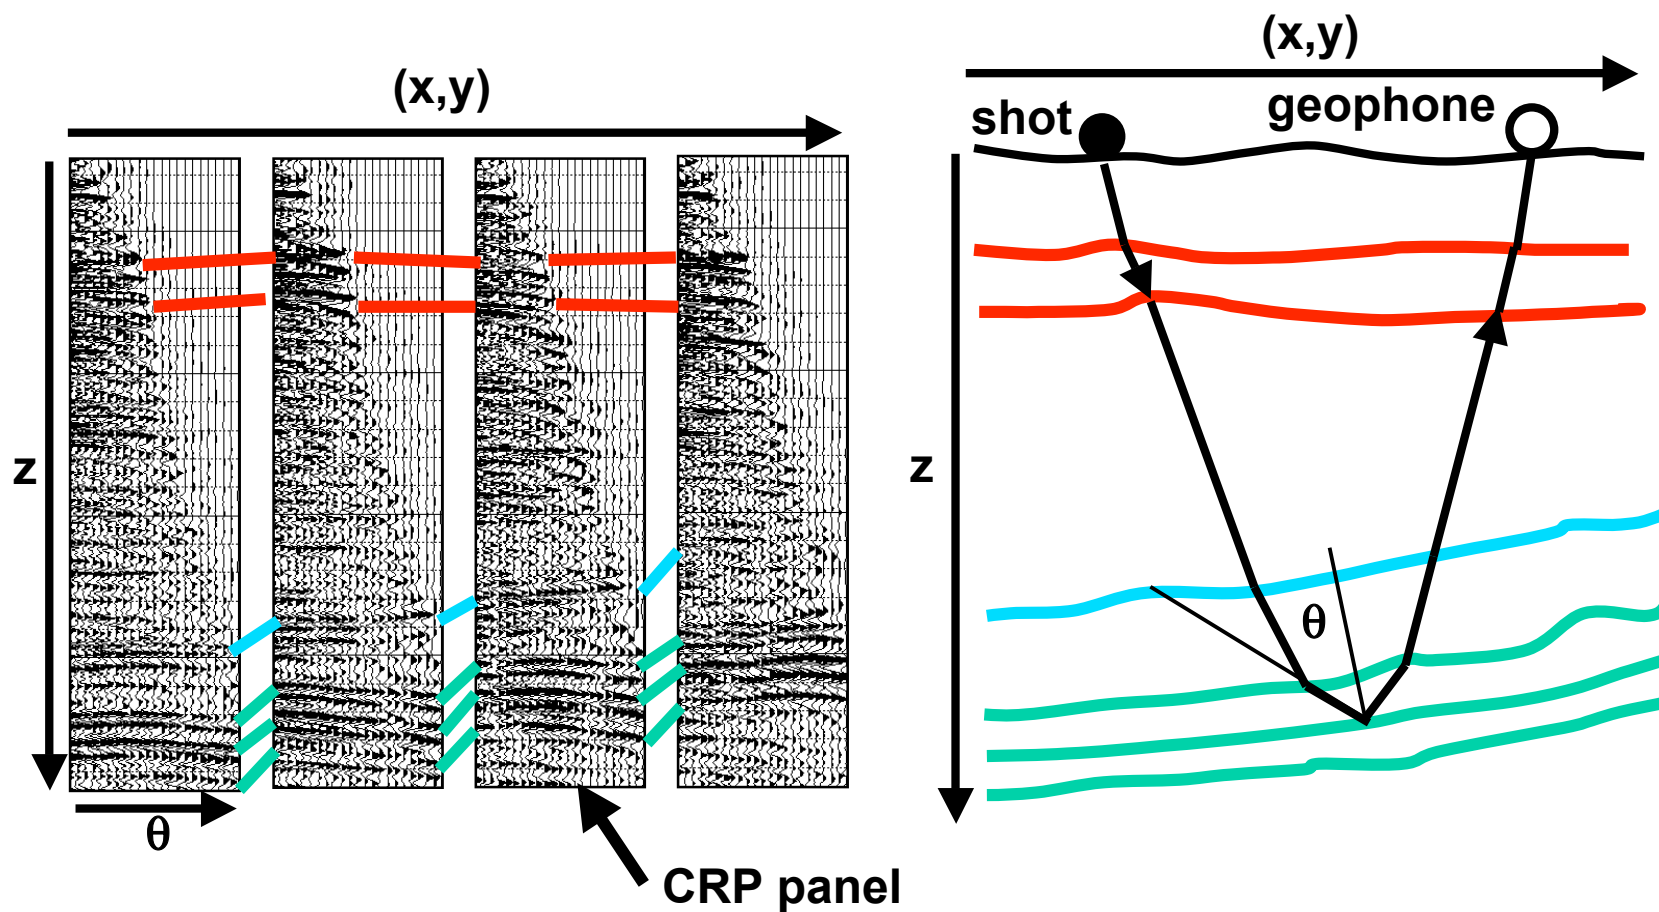


Several basic ideas and issues guide this work



- **use the simplest techniques that prove to be effective**
- **use approach of:**
 - signal / image processing
 - machine vision
 - supervised learning techniques
- **feature analysis is the key**
 - GIGO
- **exploit information about:**
 - prior knowledge from human experts
 - spatial context

Processing flow

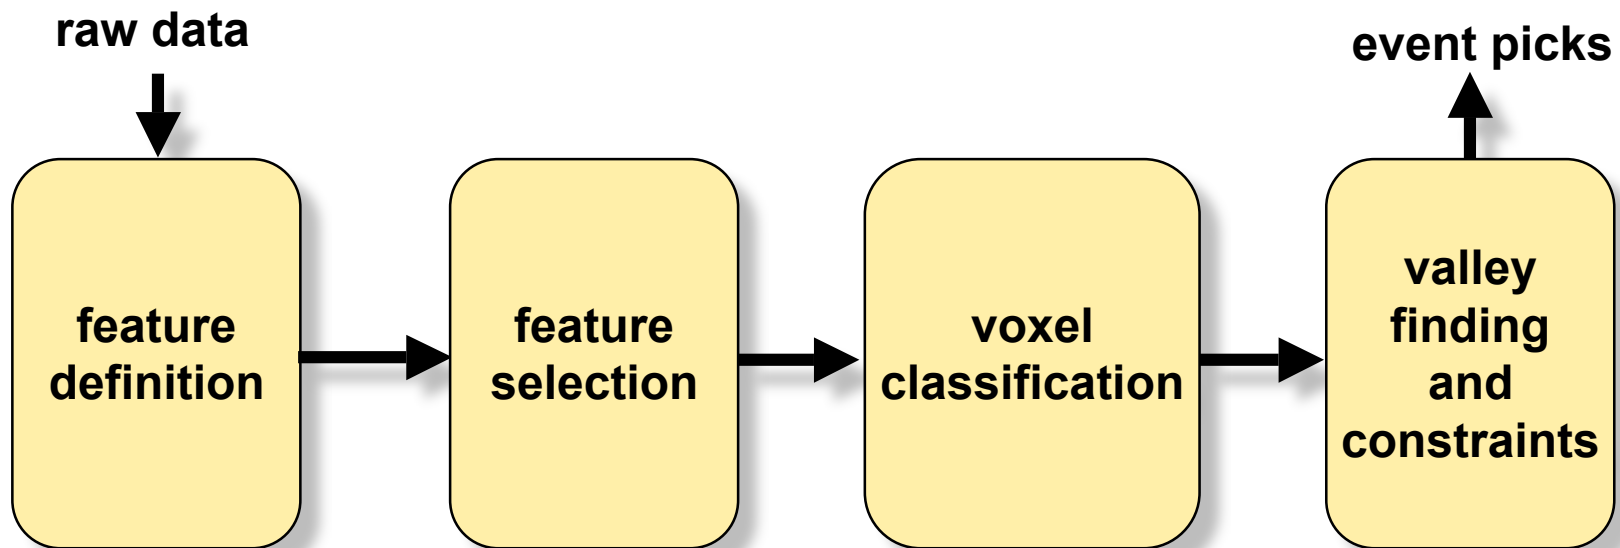


Algorithms used in the processing flow



- **feature definition**
 - 2D Gabor transforms
 - semblance
 - amplitude histogram
 - proximity
- **feature selection**
 - sequential forward selection
- **voxel classification**
 - probabilistic neural network (PNN)
 - connected components
- **valley finding and constraints**
 - size
 - continuity


The algorithm used

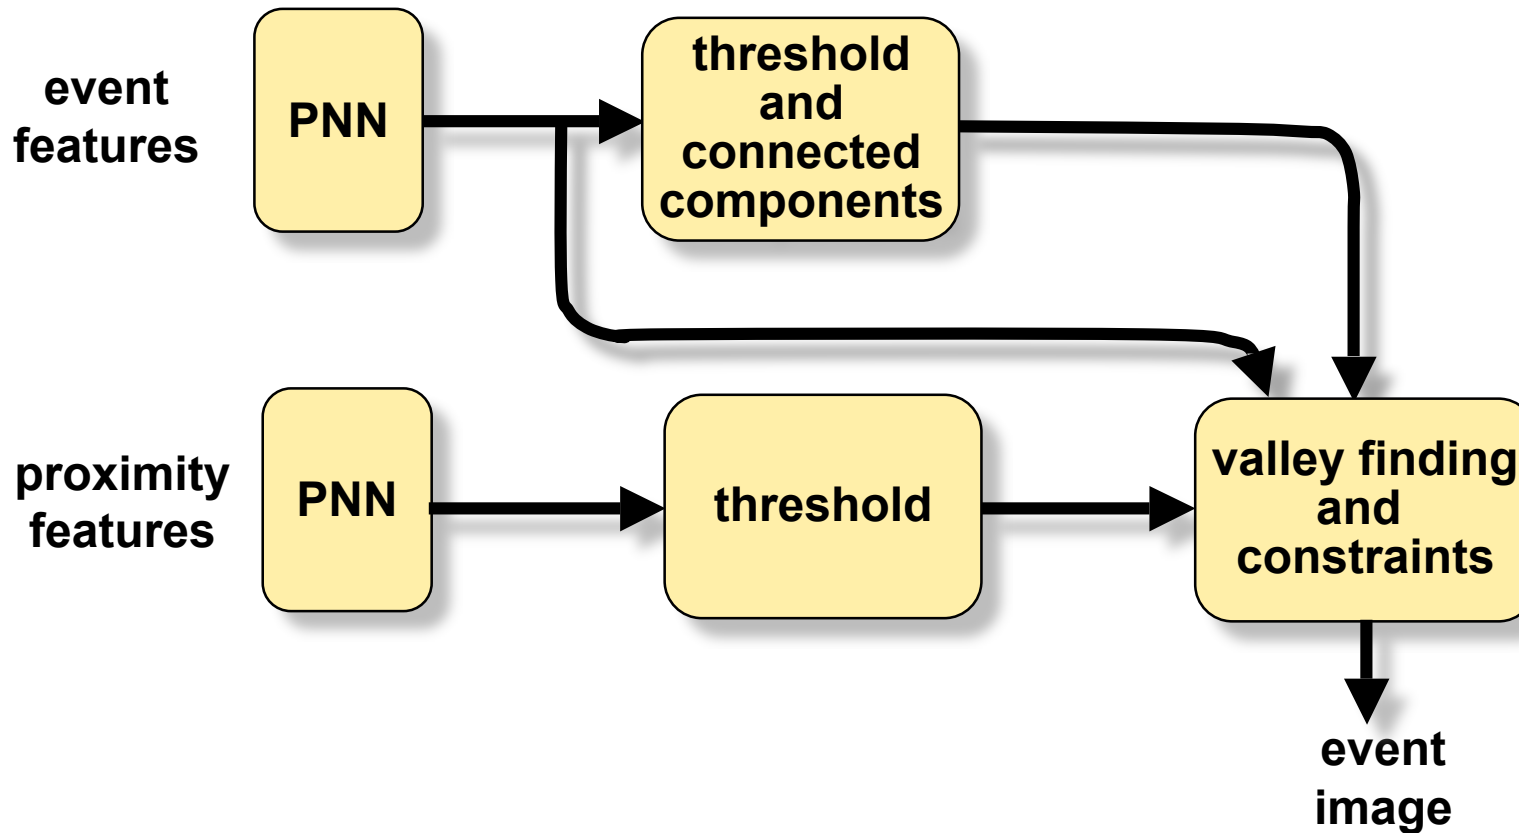

Prestack migrated data (raw data)




- deepwater GOM
- 2D dataset
- JIGSAW prospect

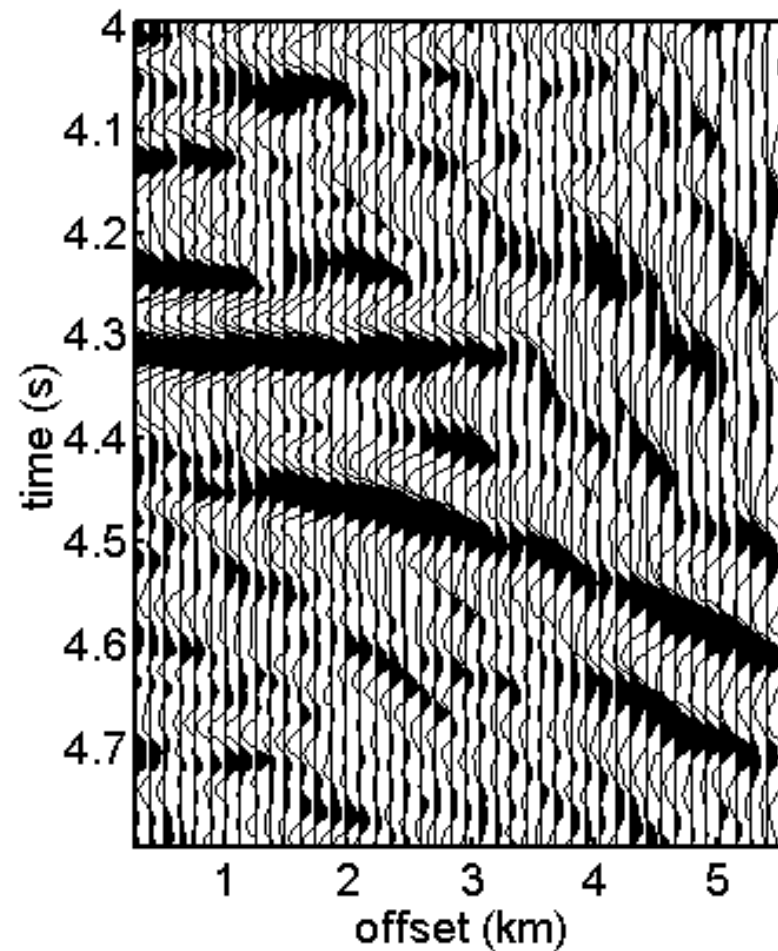







Useful features of the raw data




- **statistical moment**
 - mean, etc.
 - moment over **red** box
- **semblance**
- **Gabor transforms**
 - magnitude & phase
 - 2 scales
 - 4 slopes

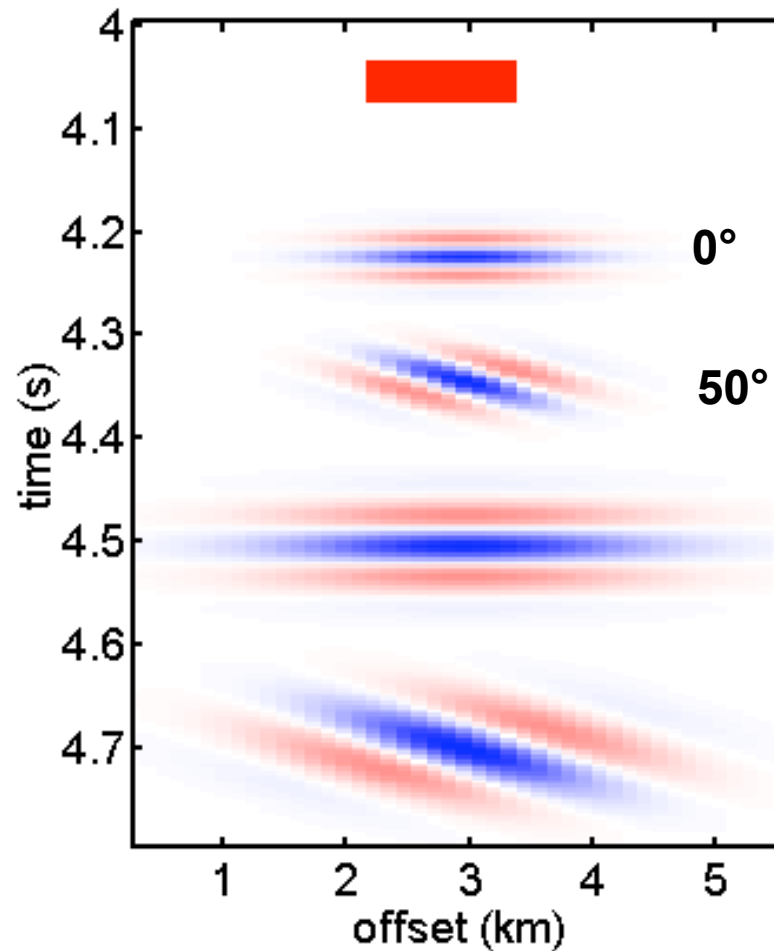


Event feature images are formed

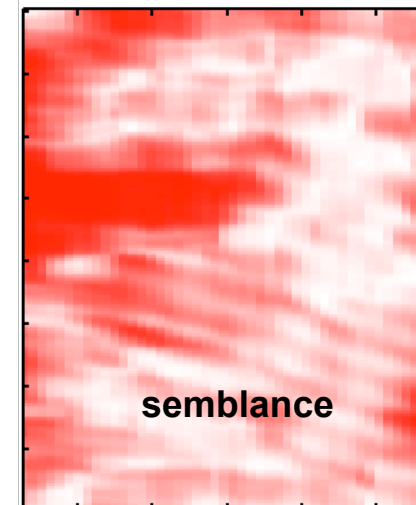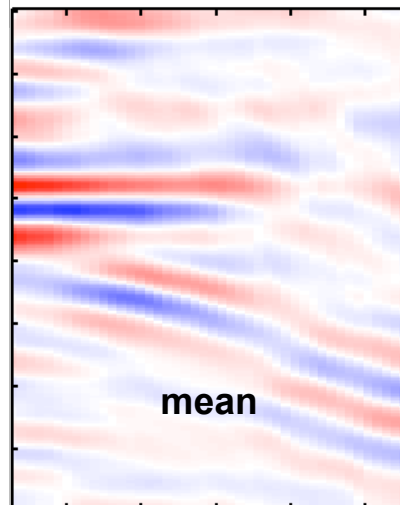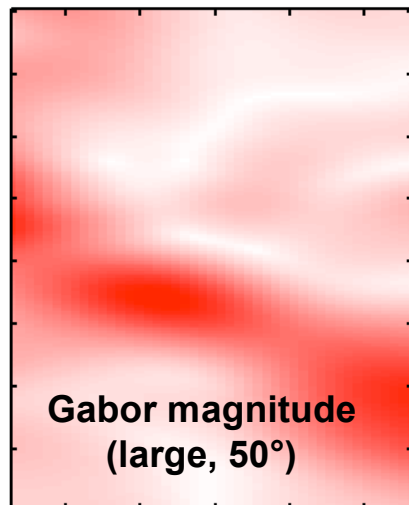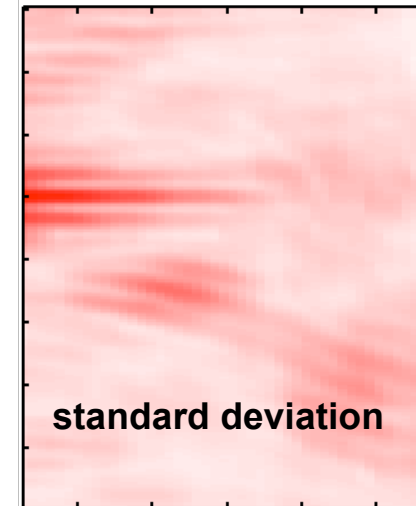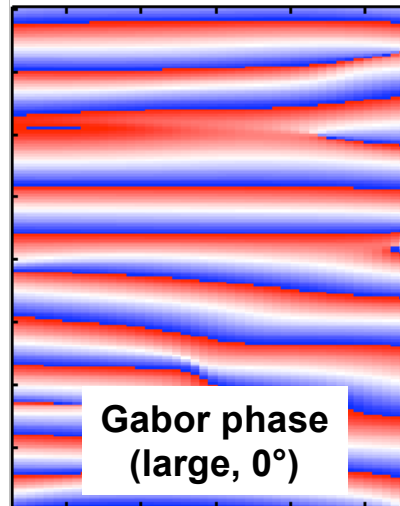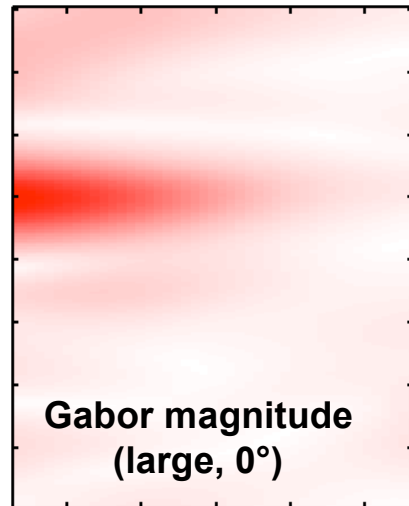

Features are ranked via Sequential Forward Selection algorithm

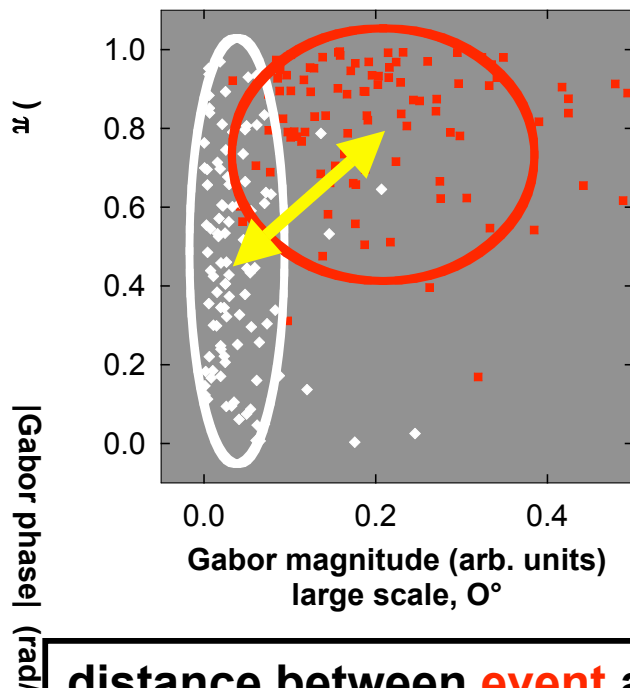

distance between **event** and **background** cluster used

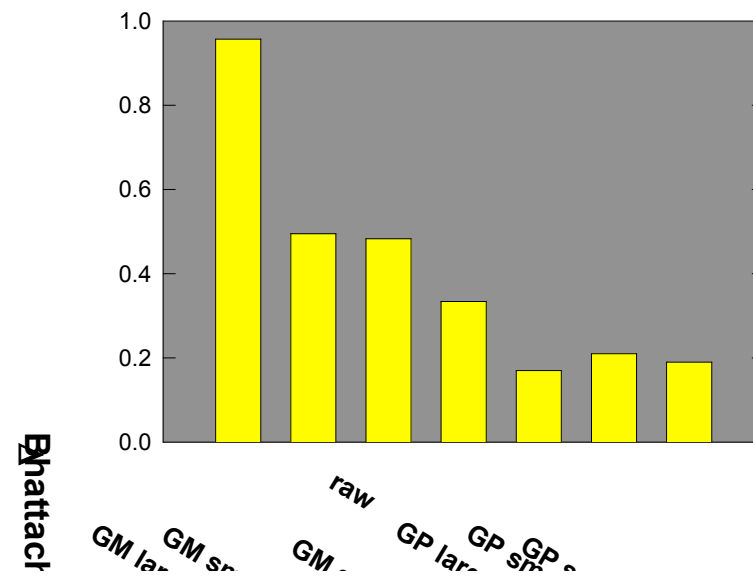

GM = magnitude of Gabor transform
GP = phase of Gabor transform

Posterior probability image using event features as input





■ training set


- 107 events
- 100 background
- 20 out of 468 CRPs
- 0.5% of picks

■ probability of correct classification

- 89% to 96%

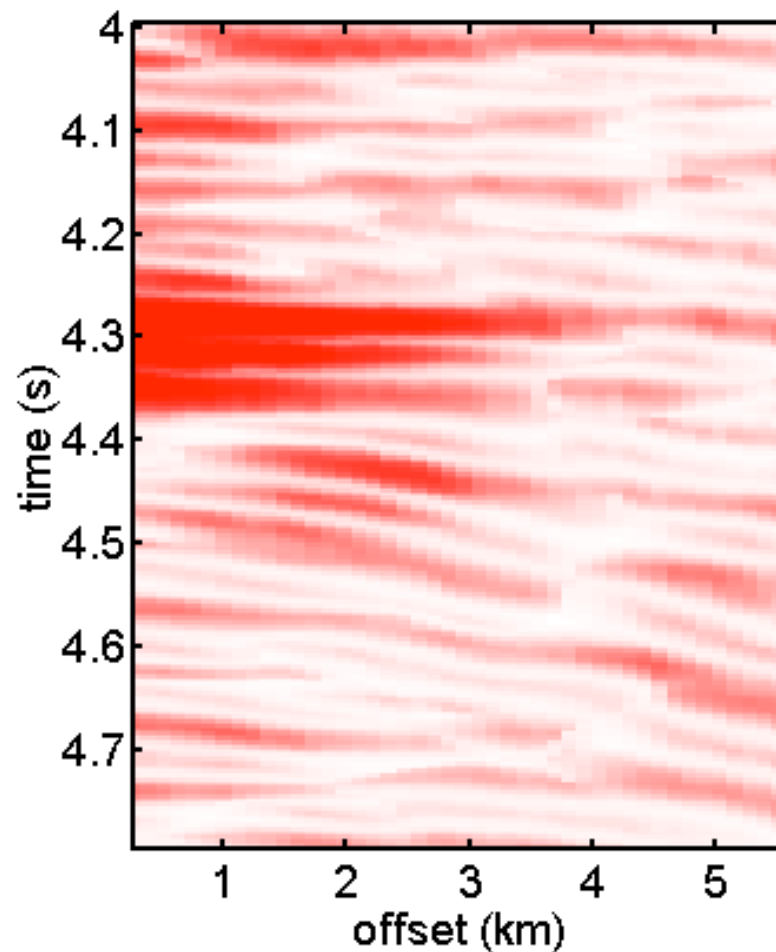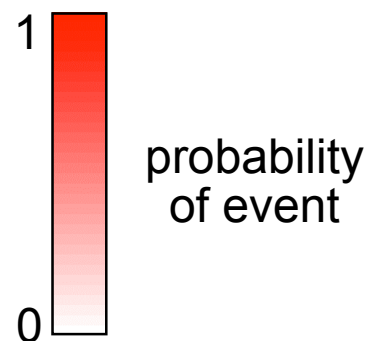


Proximity features allow for human contextual input

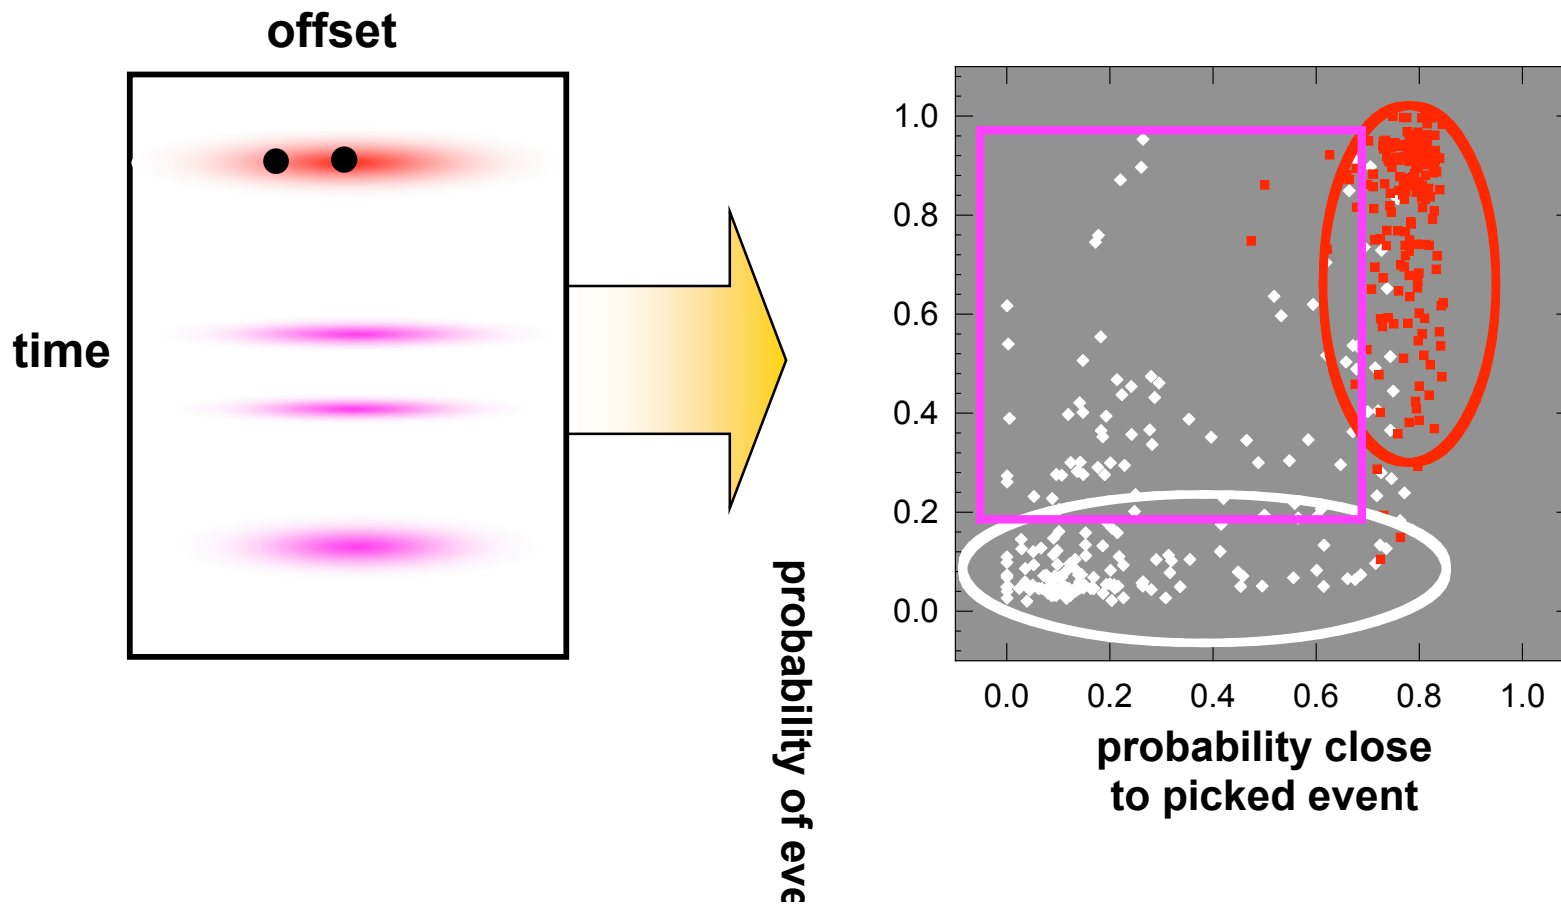


Posterior probability image using proximity features as input




- **193 picks used**
 - 1% of picks
- **mask for constraining search space**

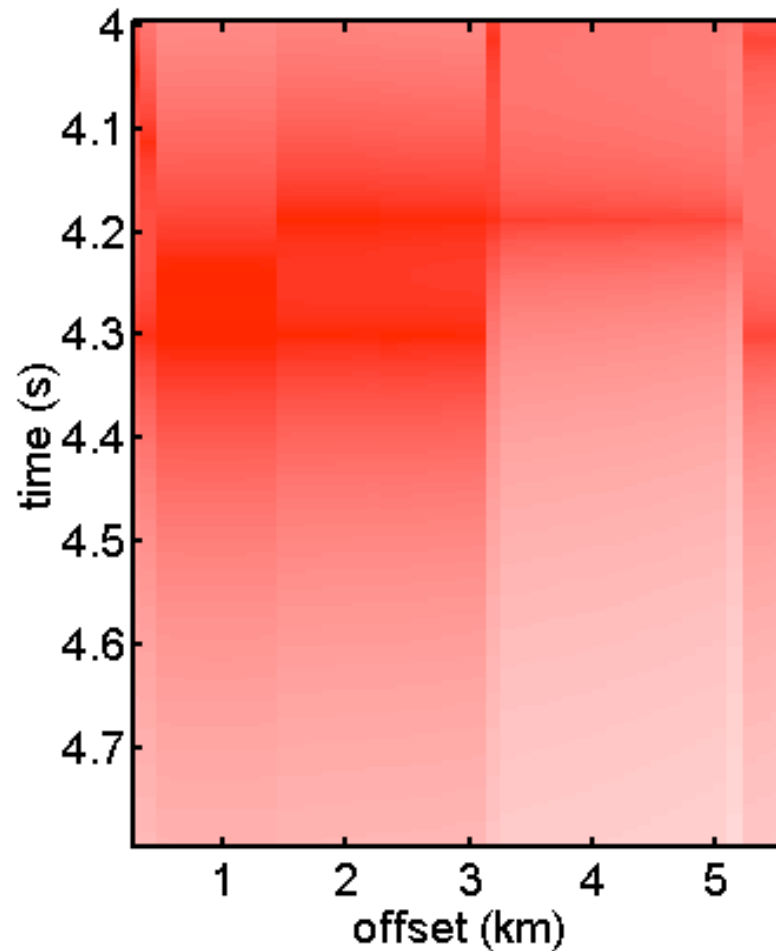

Binary labeled image

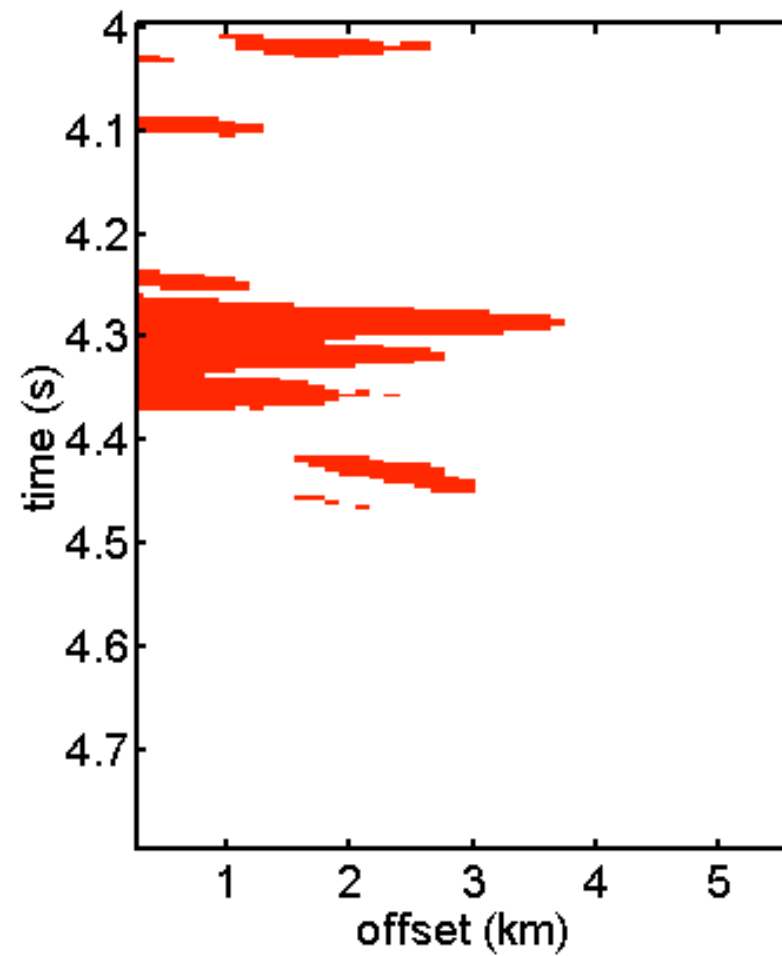


Connected components labeled image

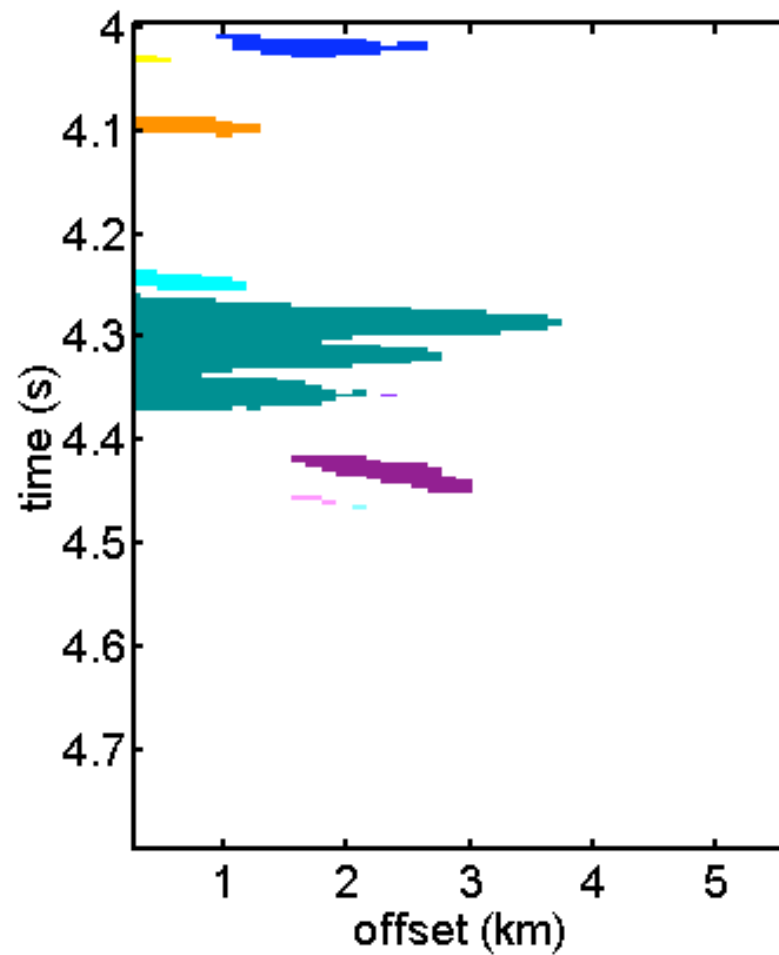


Event image





- size
- one time / offset / cloud
- continuous
- max posterior probability

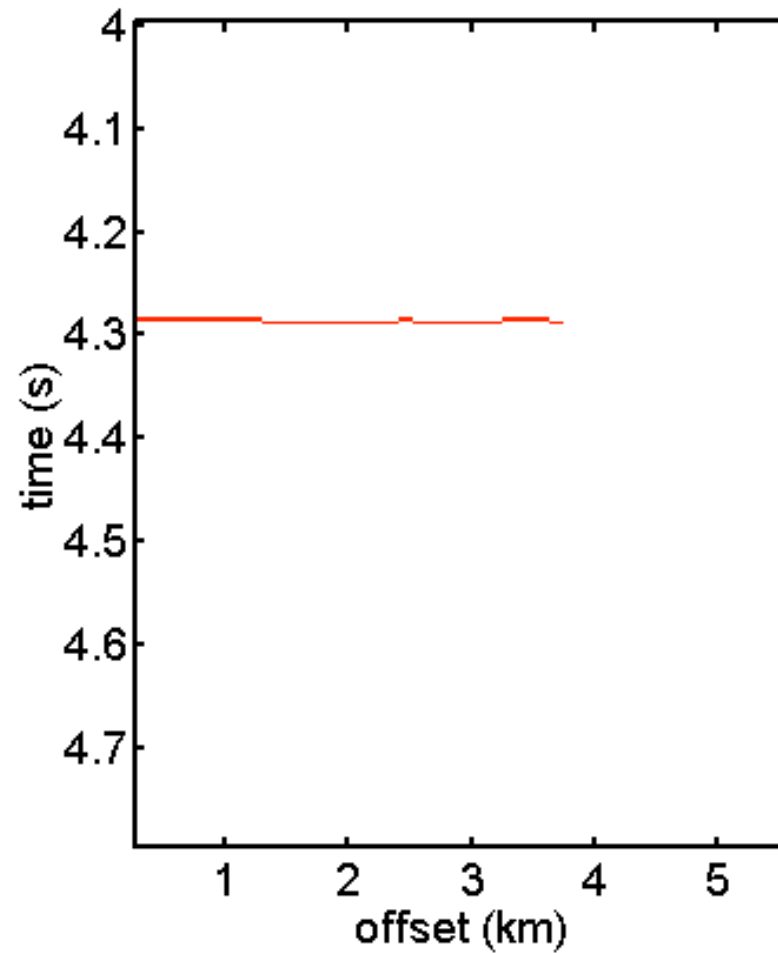


Automated picks compared to human picks

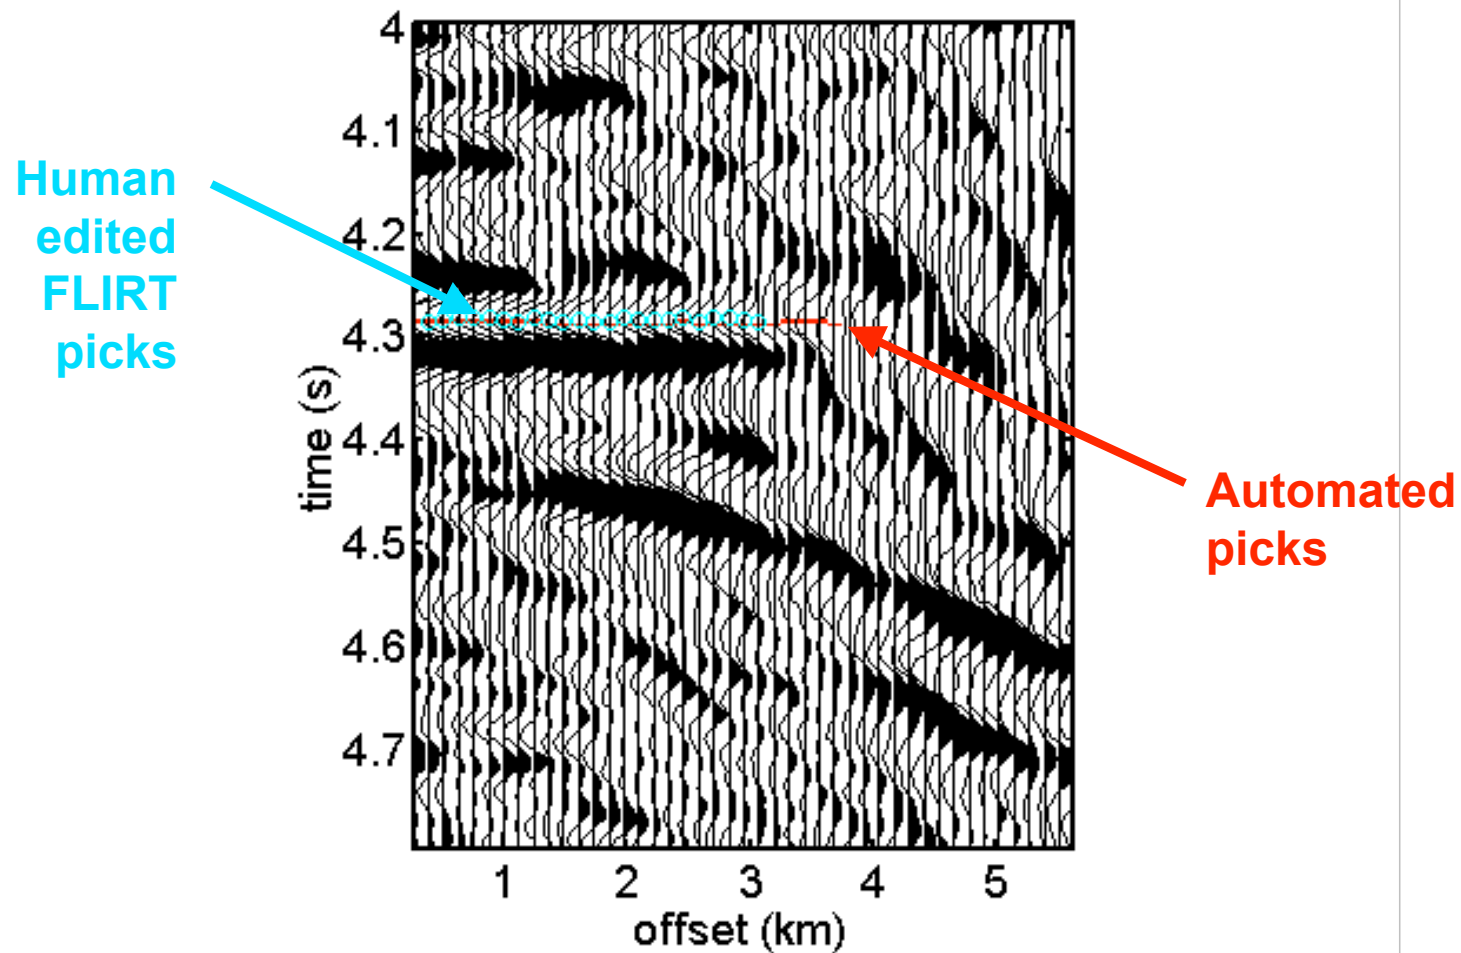


PNN prevents loop skips in low signal to noise data

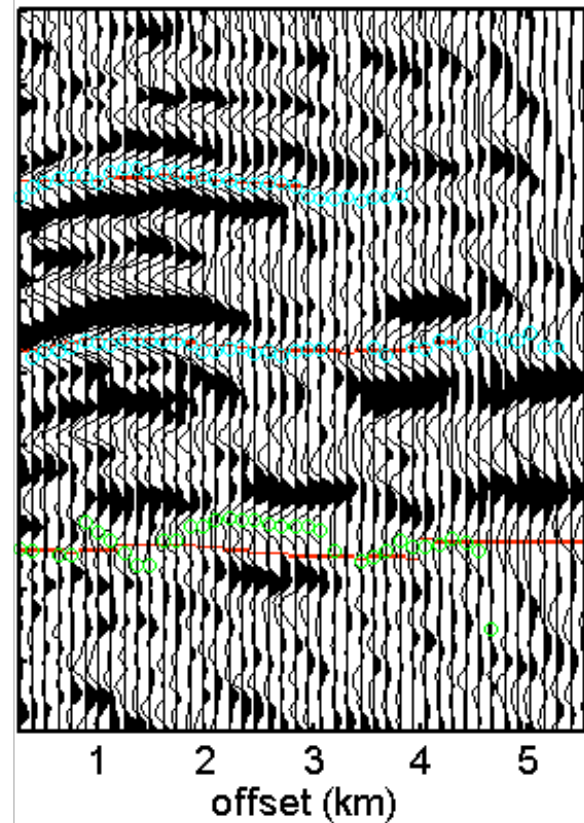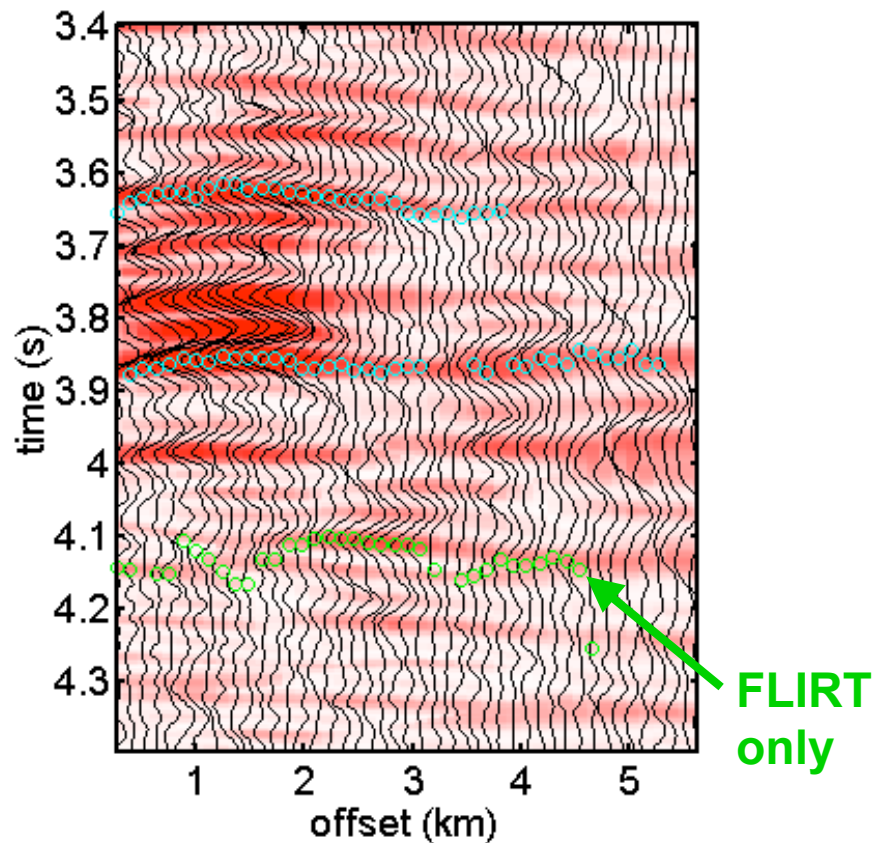


Neural network picker applied to 2D GOM dataset (JIGSAW)

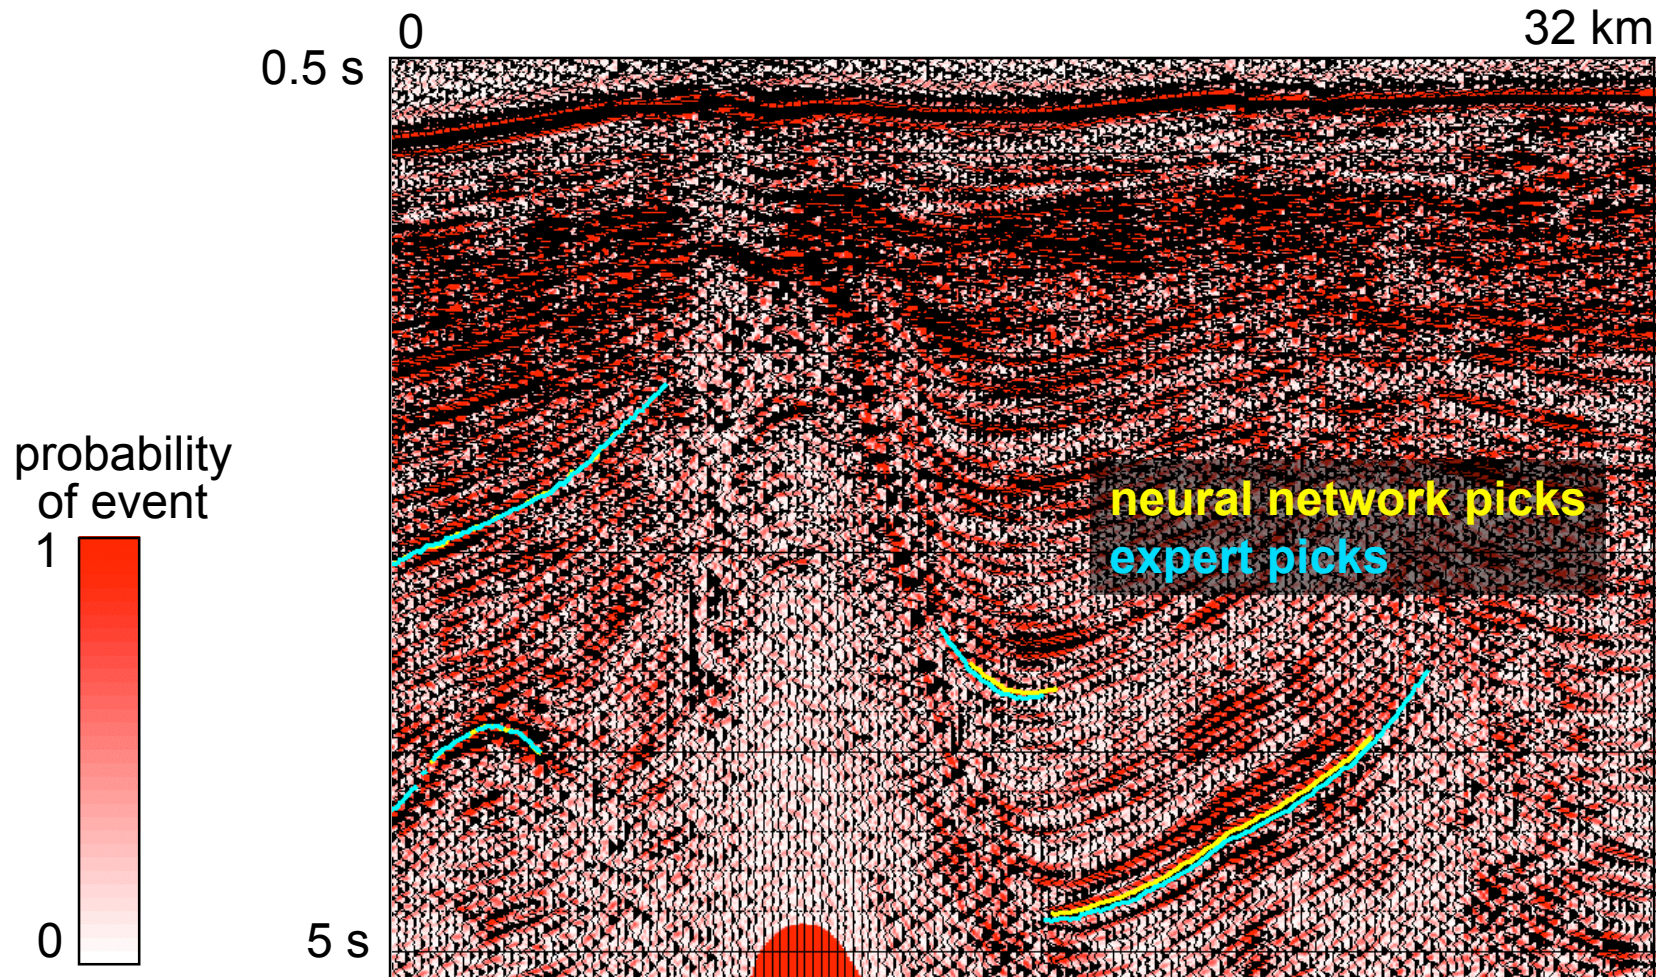


Neural network picks compare well with expert picks

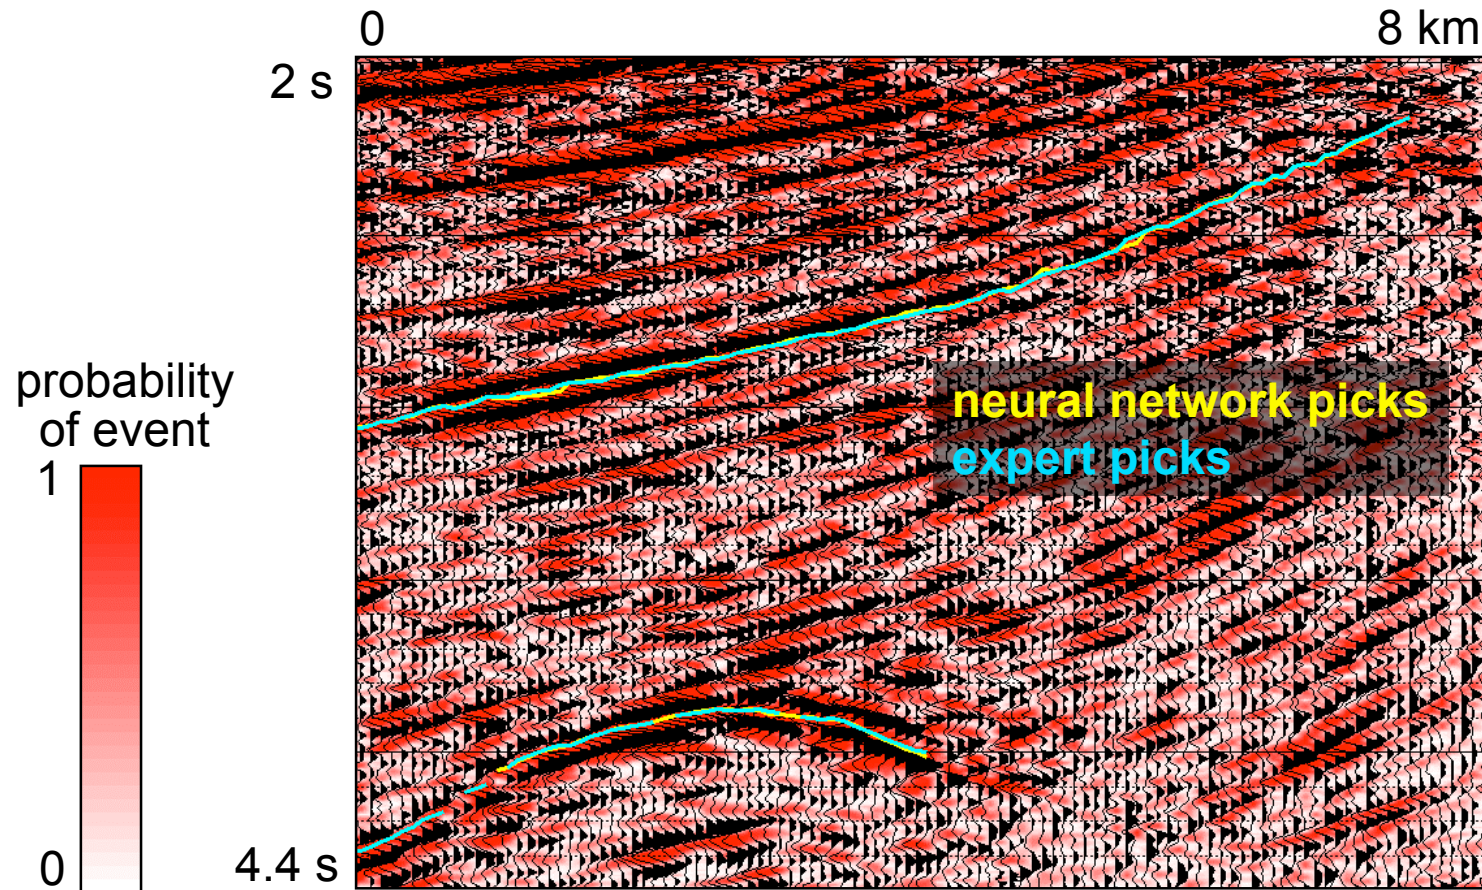

Neural network sometimes consistently picks on different loop

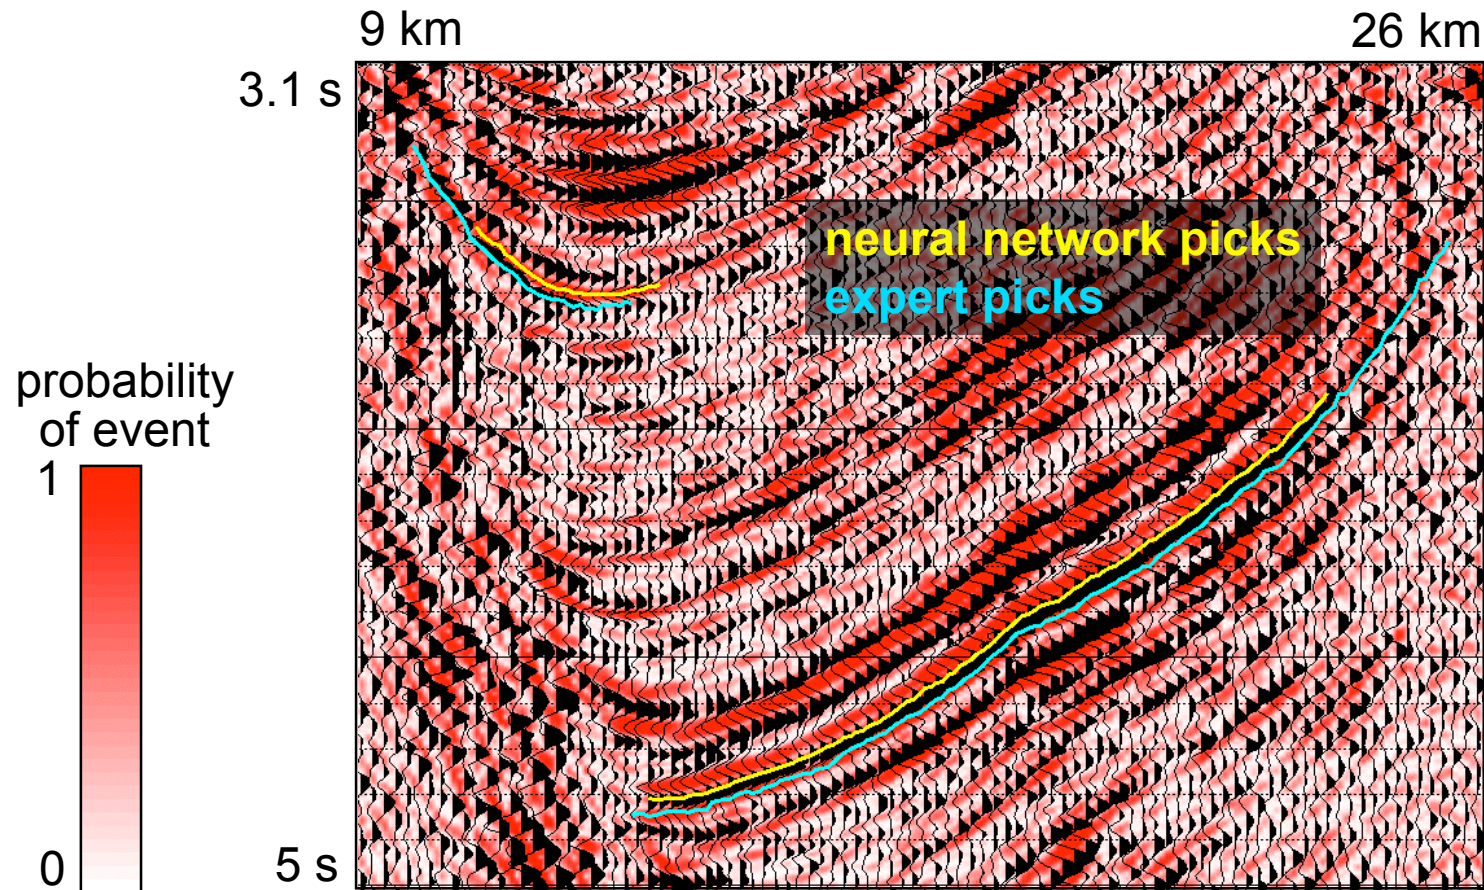

Neural network picker is not as aggressive as expert

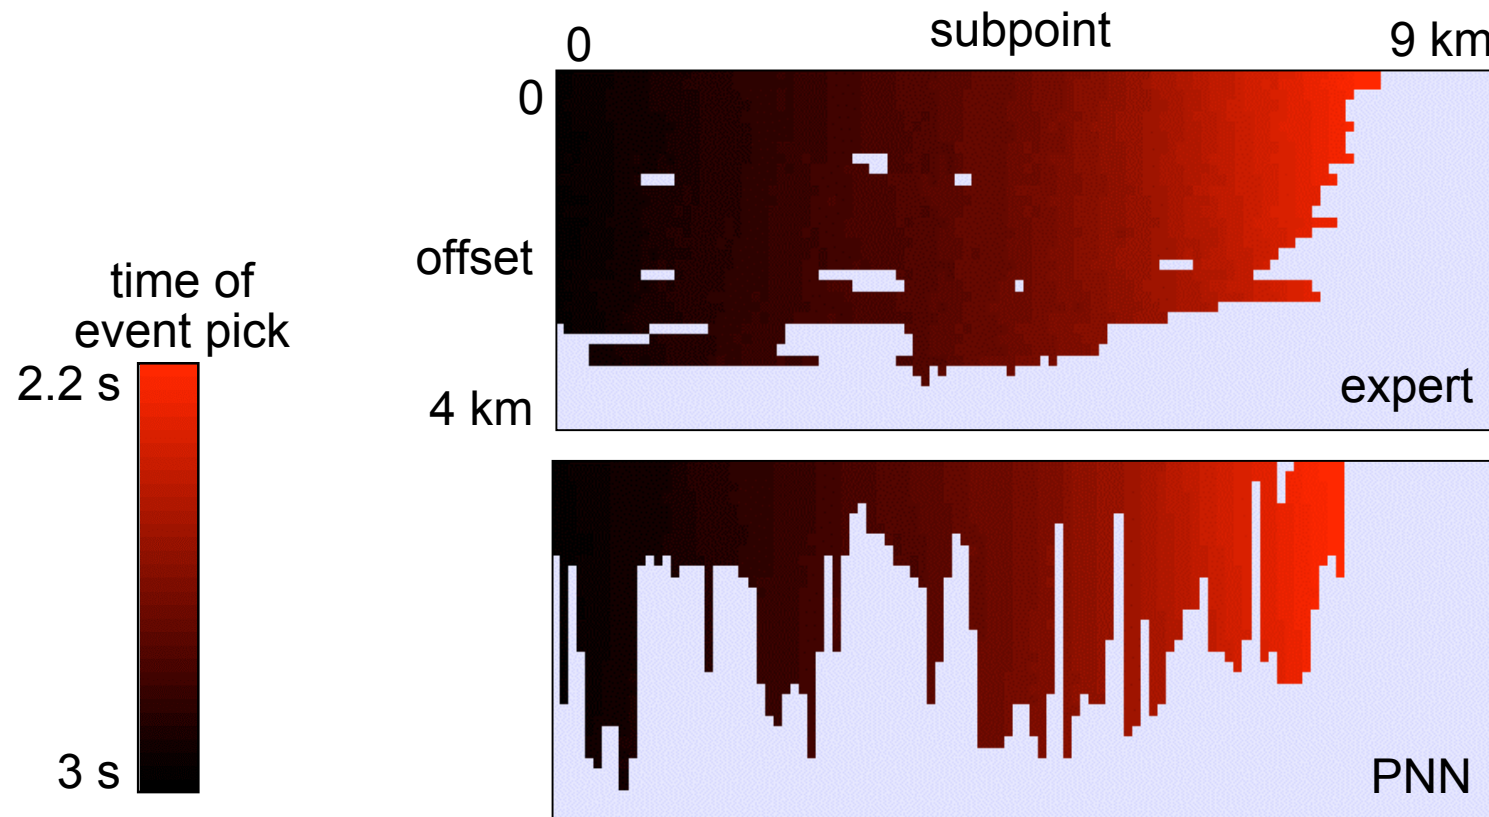

Computer time needed



- **15 ms / voxel / feature**
 - interpreted MATLAB
 - PowerBook 5300c
 - 7 features used (6 Gabor, raw data)
- **60 μ s / voxel / feature**
 - Sparc Ultra 1
 - compiled C++
 - 7 days for 4 OCS blocks

Summary and future work



- **Gabor transform captures character of event**
 - better than semblance and amplitude histogram
- **PNN combines features into best guess**
 - prevents loop skips
- **proximity is a way to quantify where to look**
- **could enable 3D PSDM**
 - cost reduced from \$75,000 to \$6,000 (4 OCS blocks)
 - cycle time reduced from 12 weeks to 1 week
 - improve robustness of inversion (more picks)
- **further evaluation needed on other datasets**
- **tracking of PNN result needs to be improved (aggressiveness)**